

## Switching Diodes

### Features

- For surface mounted applications
- Glass Passivated Chip Junction
- Fast reverse recovery time
- Ideal for automated placement
- Lead free in comply with EU RoHS 2011/65/EU directives



### Mechanical Data

- Case: SOD-123FL
- Polarity: Color band denotes cathode end
- Approx. Weight: 0.015g

### Ordering Information

Part Number	Marking	Shipping	Reel
LT4148L-TR3	W1	3000PCS Tape&Reel	7 inches
LT4148L-TR12	W1	12000PCS Tape&Reel	13 inches

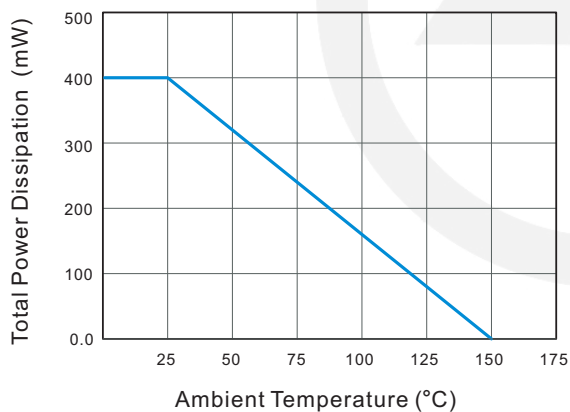
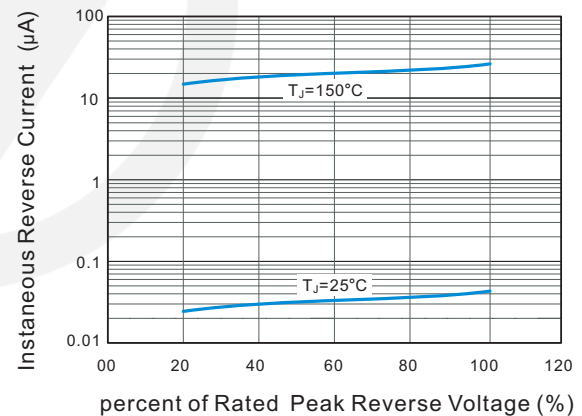
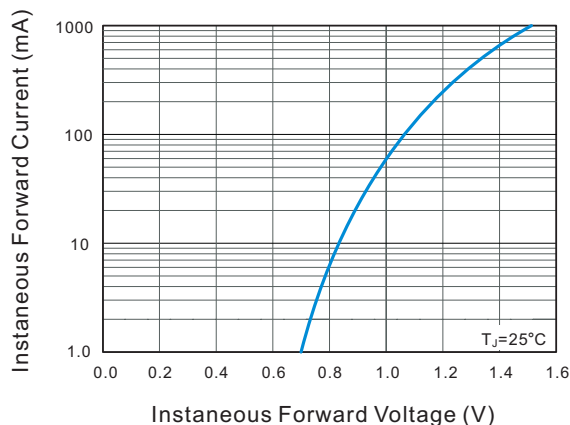
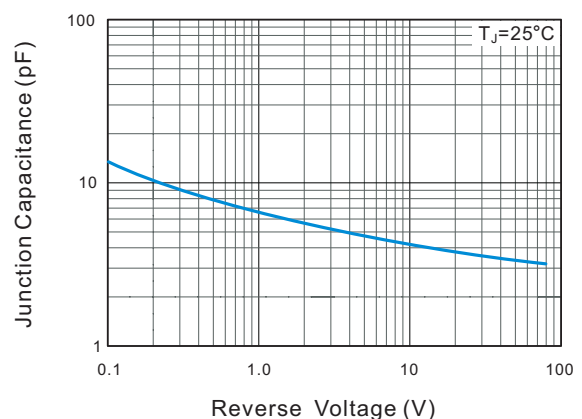
### Absolute Maximum Ratings at 25°C

Parameter	Symbol	LT4148L	Unit
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	100	V
Maximum RMS voltage	$V_{RMS}$	75	V
Continuous Forward Current	$I_F$	300	mA
Non-repetitive Peak Forward Surge Current at 1ms	$I_{FSM}$	4	A
Total Power Dissipation	$P_{tot}$	400	mW
Typical Thermal Resistance (Note1)	$R_{\theta JA}$	450	°C/W
Operating and Storage Temperature Range	$T_j, T_{stg}$	-55 ~ +150	°C

Note: ( 1 ) PCB mounted with 2.0" X 2.0" (5cm X 5cm) copper pad areas.

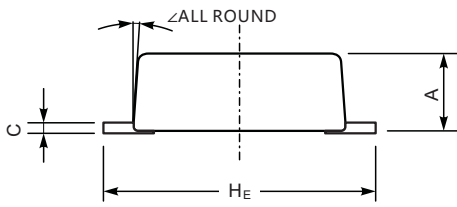
**Characteristics at T<sub>a</sub>= 25°C**

Parameter	Symbol	LT4148L	Unit
Reverse Breakdown Voltage at I <sub>R</sub> =1μA	V <sub>(BR)R</sub>	75	V
Maximum Forward Voltage at 1mA at 10mA at 50mA at 150mA at 300mA	V <sub>F</sub>	0.715 0.855 1.00 1.25 1.5	V
Peak Reverse Current at V <sub>R</sub> =20V T <sub>J</sub> =25°C at V <sub>R</sub> =75V T <sub>J</sub> =25°C at V <sub>R</sub> =25V T <sub>J</sub> =150°C at V <sub>R</sub> =75V T <sub>J</sub> =150°C	I <sub>R</sub>	0.025 1 30 50	μA
Typical Junction Capacitance f=1MHz, V <sub>R</sub> =4V	C <sub>j</sub>	5	pF
Maximum Reverse Recovery Time	t <sub>rr</sub> Typical	8	ns

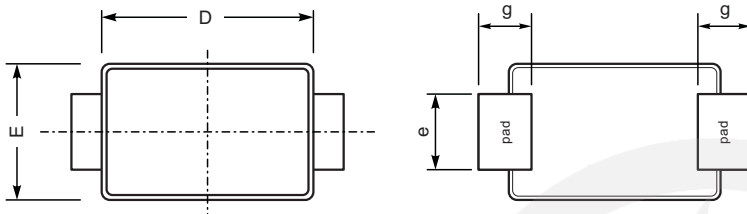
**Characteristics Curve**
**Fig.1 Power Derating Curve**

**Fig.2 Typical Reverse Characteristics**

**Fig.3 Typical Instantaneous Forward Characteristics**

**Fig.4 Typical Junction Capacitance**


**SOD-123FL Package Outline**

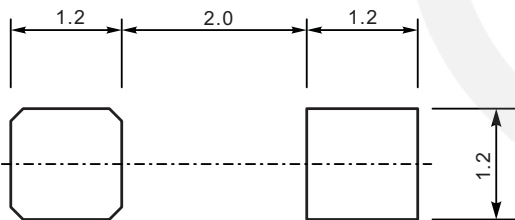
Unit : mm



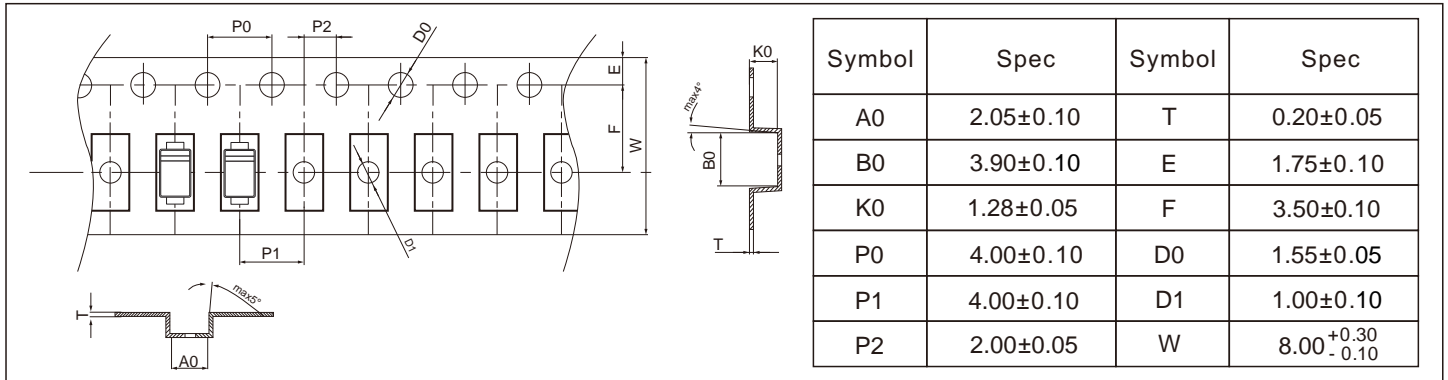
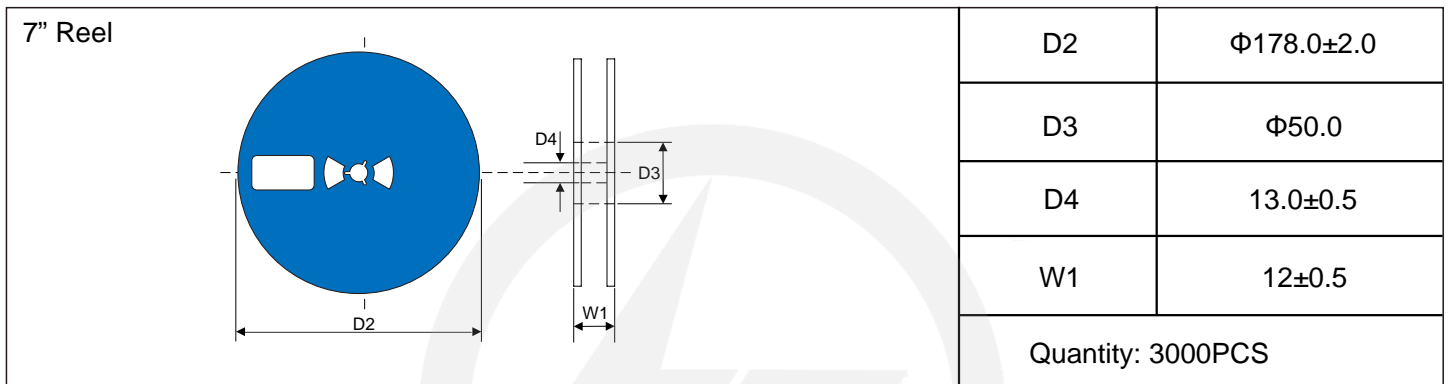
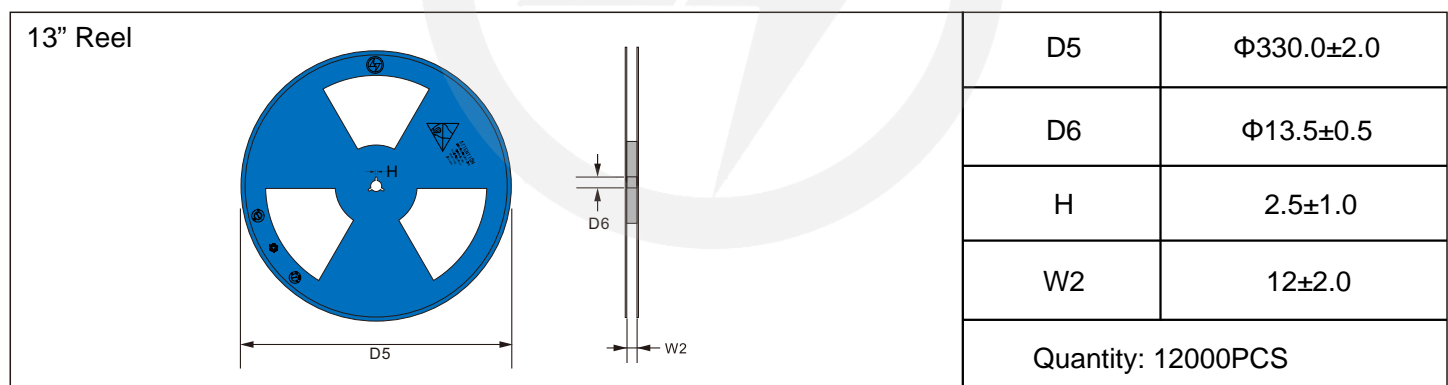
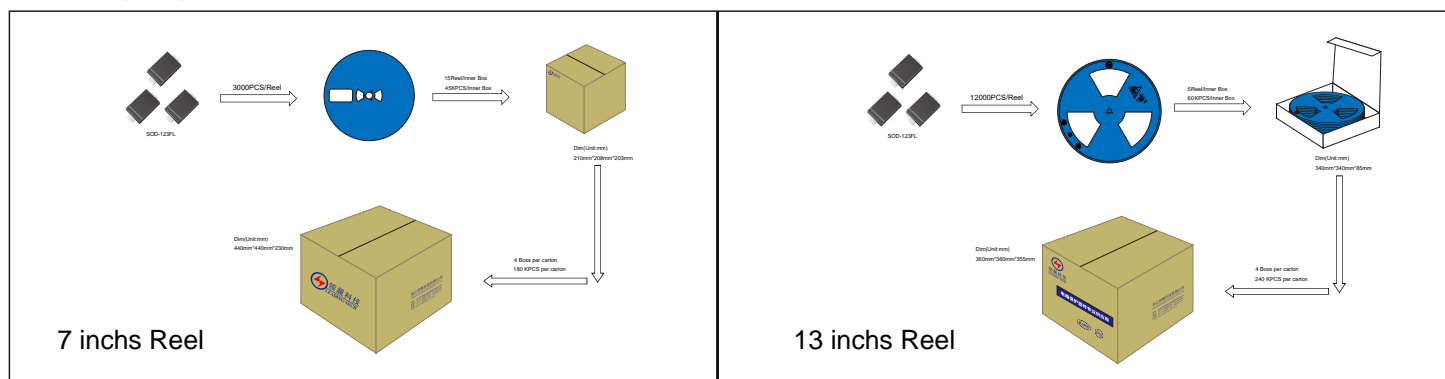
SYMBOL	DIMENSIONS	
	MIN.	MAX.
A	0.9	1.35
C	0.12	0.20
D	2.6	2.9
E	1.75	1.95
e	0.8	1.1
g	0.7	0.9
H <sub>E</sub>	3.5	3.8
∠	7°	



**SOD-123FL Suggested Pad Layout**

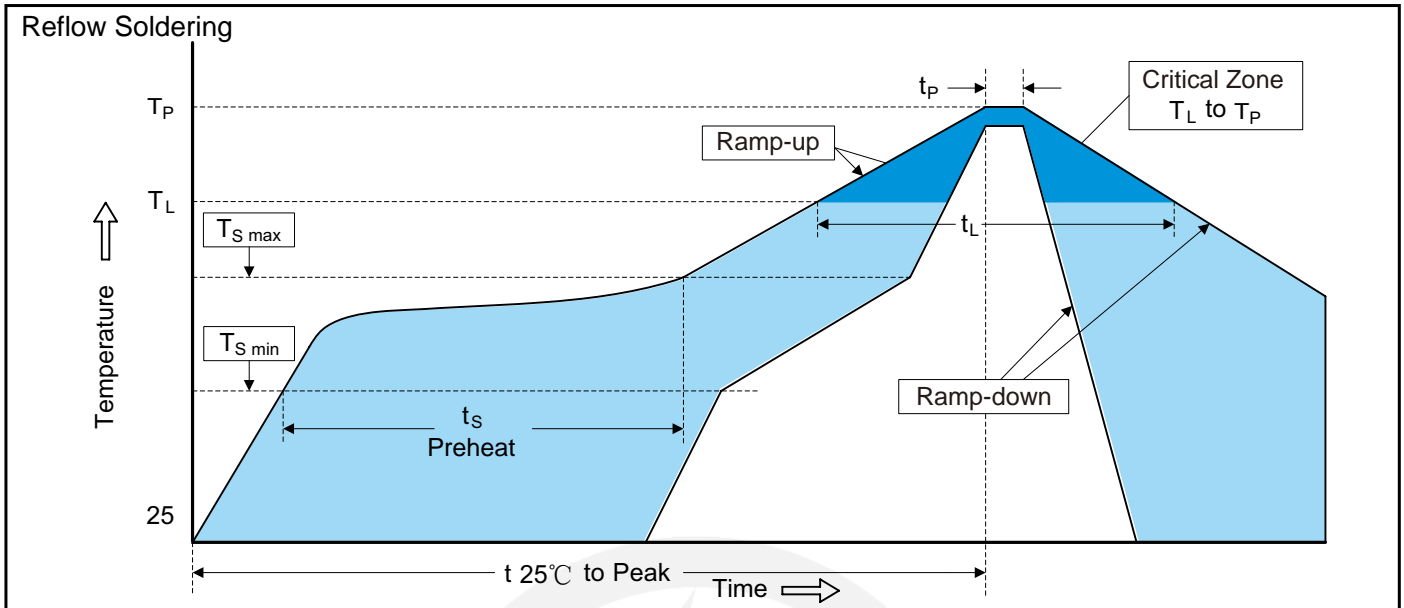


- Note:
1. Controlling dimension: in millimeters.
  2. General tolerance:  $\pm 0.05\text{mm}$
  3. The pad layout is for reference purpose only.

**Carrier Tape Dimensions**
**Unit : mm**

**Reel Dimensions**
**Unit : mm**

**Reel Dimensions**
**Unit : mm**

**Packaging**




Recommended Soldering Conditions



Recommended Conditions

Profile Feature	Pb-Free Assembly
Average ramp-up rate (T <sub>L</sub> to T <sub>P</sub> )	3°C/second max.
Preheat	
-Temperature Min (T <sub>S min</sub> )	150°C
-Temperature Max (T <sub>S max</sub> )	200°C
-Time (min to max) (t <sub>s</sub> )	60-180 seconds
T <sub>S max</sub> to T <sub>L</sub>	
-Ramp-up Rate	3°C/second max.
Time maintained above:	
-Temperature (T <sub>L</sub> )	217°C
-Time (t <sub>L</sub> )	60-150 seconds
Peak Temperature (T <sub>P</sub> )	260°C
Time within 5°C of actual Peak Temperature (t <sub>p</sub> )	20-40 seconds
Ramp-down Rate	6°C/second max.
Time 25°C to Peak Temperature	8 minutes max.

## Important Notice and Disclaimer

Leading-Tech reverses the right to make changes to this document and its products and specifications at any time without notice.

Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Leading-Tech makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, not does Leading-Tech assume any liability for application assistance or customer product design.

Leading-tech does not warrant or accept any liability with products which are purchase or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Leading-Tech.

Leading-Tech products are not authorized for use as critical components in life support devices or systems without express written approval of Leading-tech.

## Version Update Information

Series NO.	Enactment/Revision Date	Effective Date	Version	Revision Content	Revision Reason	Revision Person	Note
01	2024.04.19	2024.04.19	3.0	New file	/	Ding	