


## Transistor(NPN)

### Features

- For general AF applications
- High collector current
- High current gain
- Low collector-emitter saturation voltage
- Lead free in comply with EU RoHS 2011/65/EU directives




### Mechanical Data

- Case: SOT-23
- Approx. Weight: 8.1mg

### Ordering Information

Part Number	Shipping	Reel
LT817-TR3	3000PCS Tape&Reel	7 inchs
LT817-TR12	12000PCS Tape&Reel	13 inchs



### Maximum Ratings ( $T_a=25$ unless otherwise noted )

Parameter	Symbol	Value	Unit
Collector-Base Voltage	$V_{CBO}$	50	V
Collector-Emitter Voltage	$V_{CEO}$	45	V
Emitter-Base Voltage	$V_{EBO}$	5	V
Collector Current	$I_C$	500	mA
Collector Power Dissipation	$P_C$	300	mW
Thermal Resistance From Junction To Ambient	$R_{\theta JA}$	417	$^{\circ}C/W$
Operation Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to +150	$^{\circ}C$

### Electrical characteristics ( $T_a=25$ unless otherwise specified )









Parameter	Symbol	Test Conditions	A in	Typ	A ax	Unit
Collector-base breakdown voltage	$V_{CBO}$	$I_C=10\mu A, I_E=0$	50			V
Collector-emitter breakdown voltage	$V_{CEO}$	$I_C=10mA, I_B=0$	45			V
Emitter-base breakdown voltage	$V_{EBO}$	$I_E=1\mu A, I_C=0$	5			V
Collector cut-off current	$I_{CBO}$	$V_{CB}=45V, I_E=0$			0.1	$\mu A$
Emitter cut-off current	$I_{EBO}$	$V_{EB}=4V, I_C=0$			0.1	$\mu A$
DC current gain	$h_{FE(1)}$	$V_{CE}=1V, I_C=100mA$	100		600	
	$h_{FE(2)}$	$V_{CE}=1V, I_C=500mA$	40			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=500mA, I_B=50mA$			0.7	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C=500mA, I_B=50mA$			1.2	V
Base-emitter voltage	$V_{BE}$	$V_{CE}=1V, I_C=500mA$			1.2	V
Output capacitance	$C_{ob}$	$V_{CB}=10V, f=1MHz$		10		pF
Transition frequency	$f_T$	$V_{CE}=5V, I_C=10mA, f=100MHz$	100			MHz

### Classification Of $h_{FE}$

Rank	LT817-16	LT817-25	LT817-40
Range	100-250	160-400	250-600
Marking	6A	6B	6B or 6C




Characteristics Curves

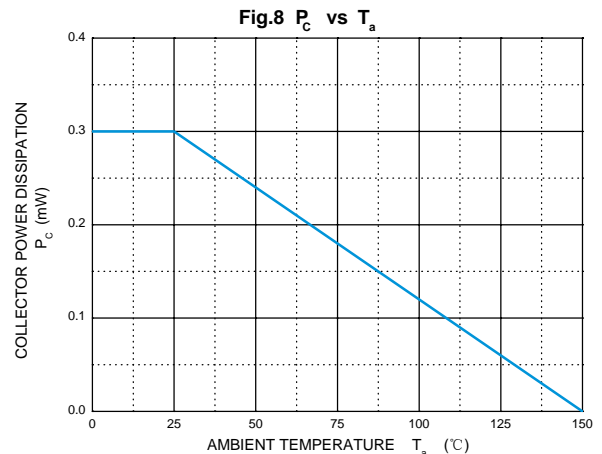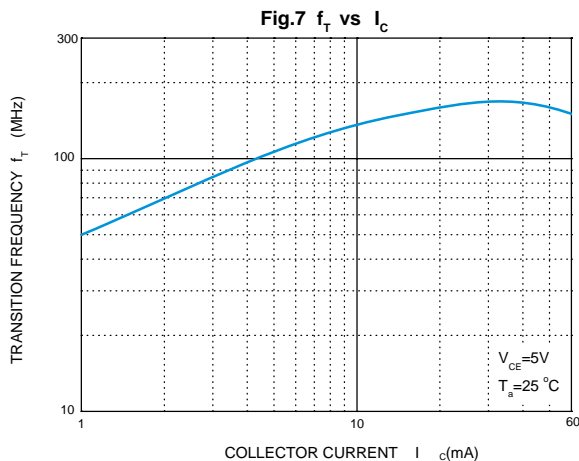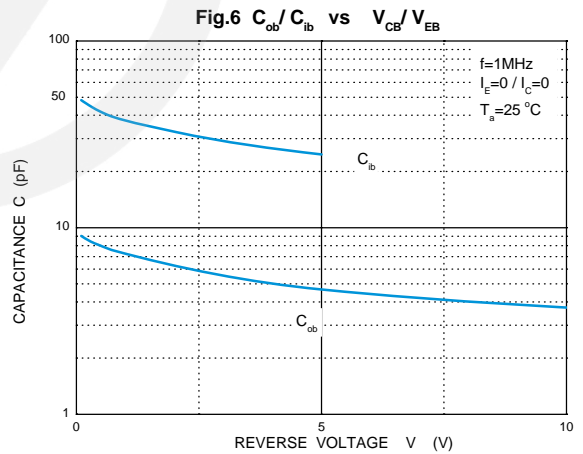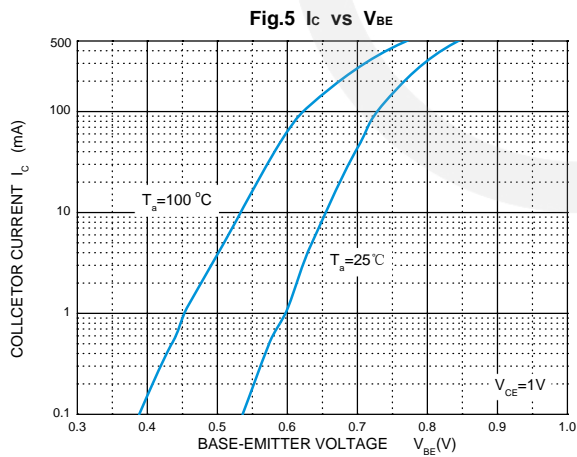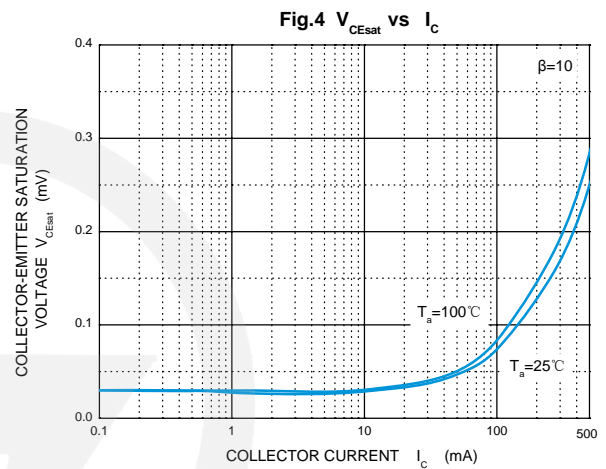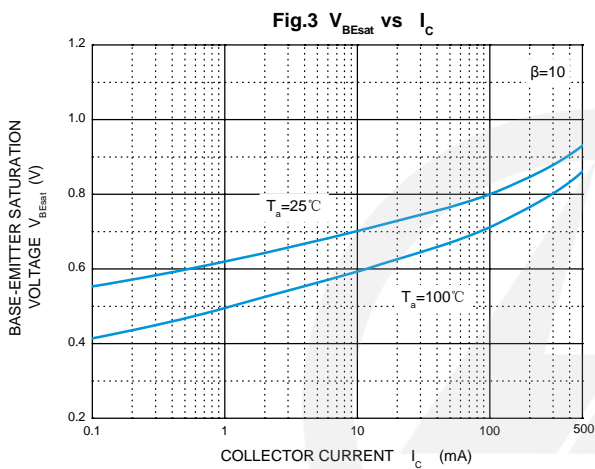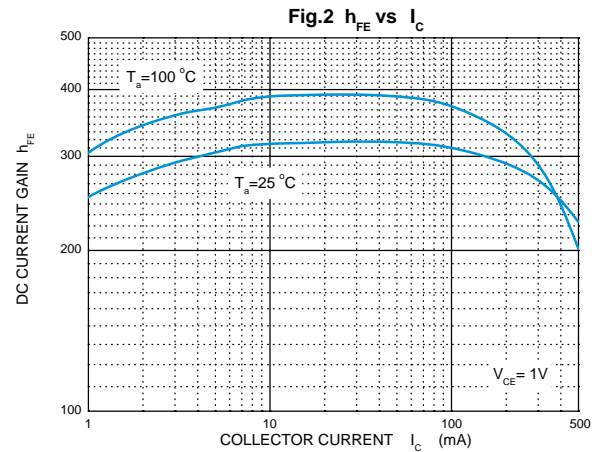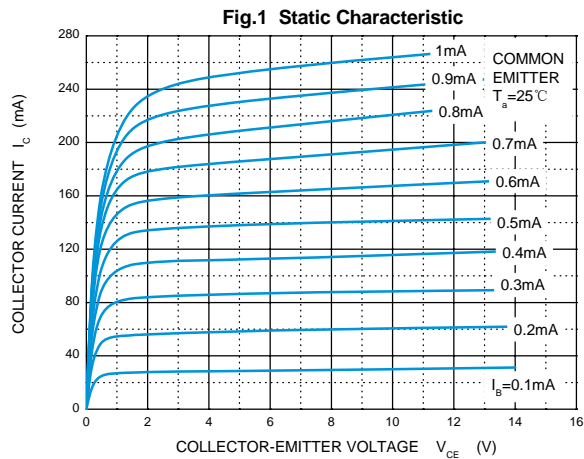




### SOT-23 Package Outline

Unit: mm

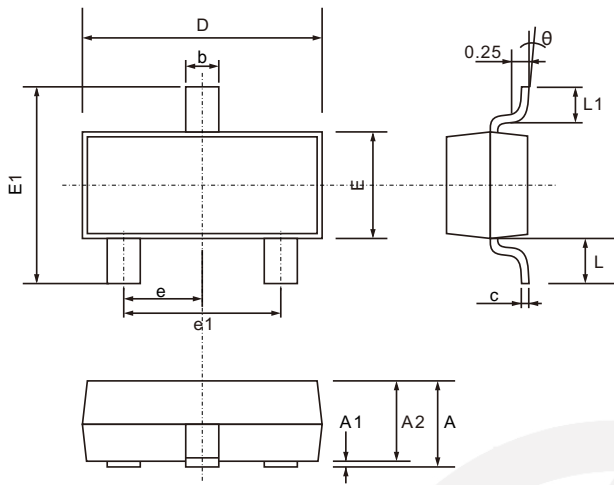

SYMBOL	DIMENSIONS	
	MIN.	MAX.
A	0.900	1.200
A1	0.000	0.100
A2	0.900	1.050
b	0.300	0.500
c	0.080	0.200
D	2.700	3.100
E	1.200	1.400
E1	2.200	2.600
e	0.950 TYP.	
e1	1.750	2.050
L	0.550 TYP.	
L1	0.300	0.500
θ	0°	8°


### SOT-23 Suggested Pad Layout

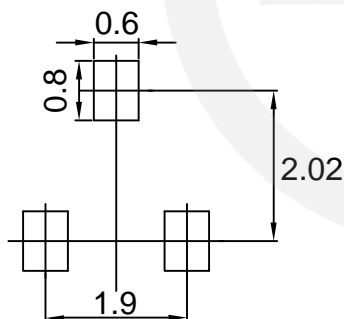

Note:  
 1. Controlling dimension: in millimeters.  
 2. General tolerance:  $\pm 0.05$  mm  
 3. The pad layout is for reference purpose only.


**Carrier Tape Dimensions**

Unit : mm

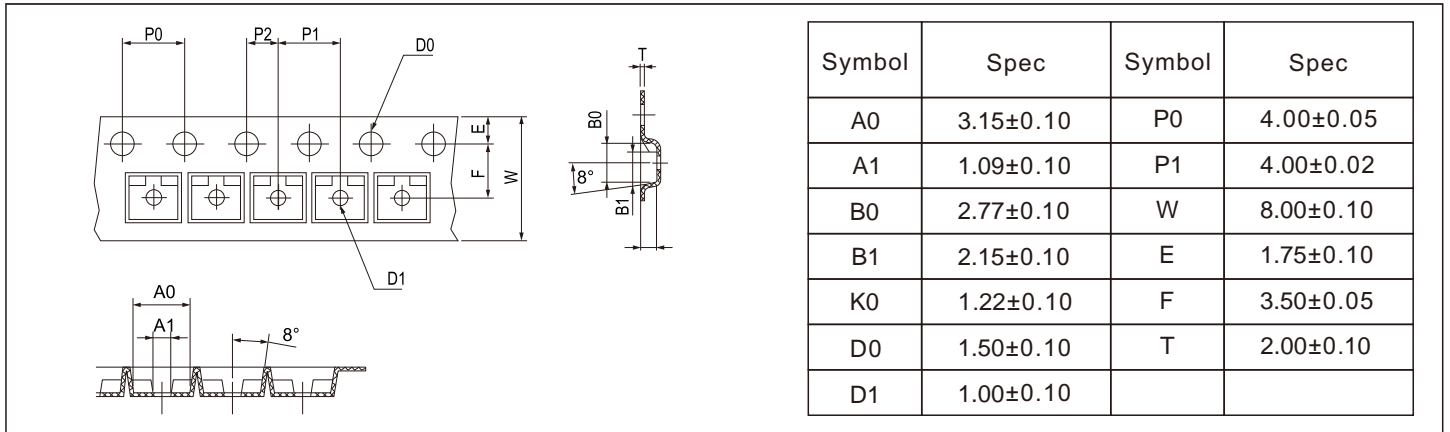


**Reel Dimensions**

Unit : mm

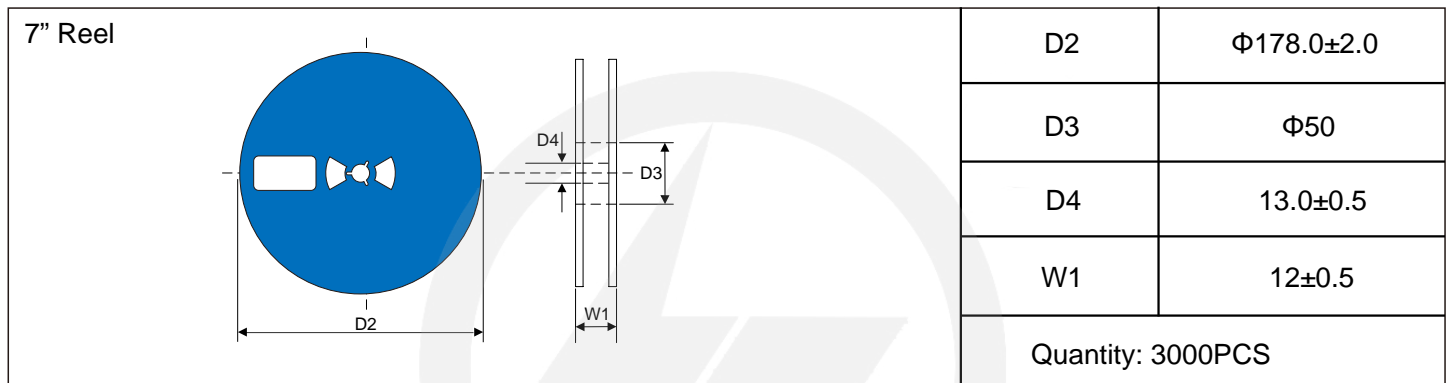


**Reel Dimensions**

Unit : mm

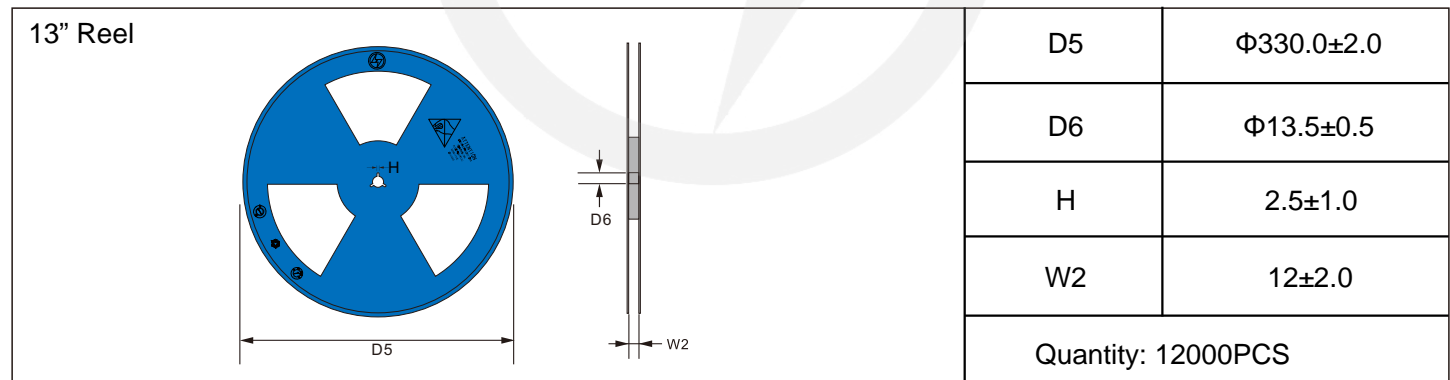

**Packaging**

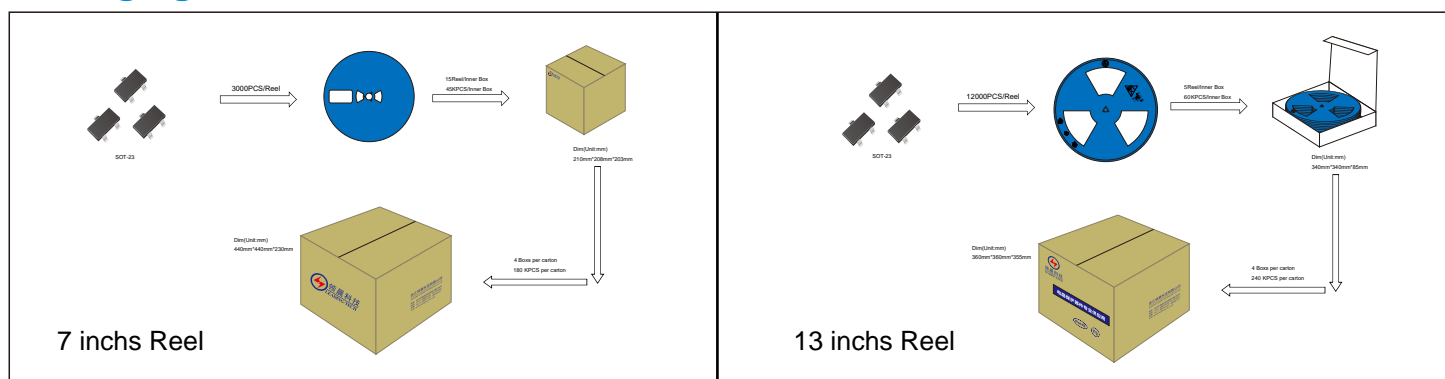



## Recommended Soldering Conditions



### Recommended Conditions

Profile Feature	Pb-Free Assembly
Average ramp-up rate ( $T_L$ to $T_P$ )	3°C/second max.
Preheat	
-Temperature Min ( $T_{S\ min}$ )	150°C
-Temperature Max ( $T_{S\ max}$ )	200°C
-Time (min to max) ( $t_s$ )	60-180 seconds
$T_{S\ max}$ to $T_L$	
-Ramp-up Rate	3°C/second max.
Time maintained above:	
-Temperature ( $T_L$ )	217°C
-Time ( $t_L$ )	60-150 seconds
Peak Temperature ( $T_P$ )	260°C
Time within 5°C of actual Peak Temperature ( $t_p$ )	20-40 seconds
Ramp-down Rate	6°C/second max.
Time 25°C to Peak Temperature	8 minutes max.

## Important Notice and Disclaimer

Leading-Tech reserves the right to make changes to this document and its products and specifications at any time without notice.

Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Leading-Tech makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, not does Leading-Tech assume any liability for application assistance or customer product design.

Leading-Tech does not warrant or accept any liability with products which are purchase or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Leading-Tech.

Leading-Tech products are not authorized for use as critical components in life support devices or systems without express written approval of Leading-Tech.

## Version Update Information

Series NO.	Enactment/Revision Date	Effective Date	Version	Revision Content	Revision Reason	Revision Person	Note
01	2024.03.18	2024.03.18	3.0	New file	/	Ding	
02	2025.06.17	2025.06.17	3.1	Update packaging information	/	Ding	
03	2026.01.22	2026.01.22	3.2	Modify the marking of LT817-40 to 6B or 6C	/	Ding	
04	2026.03.06	2026.03.06	3.3	Package outline E1(max)=2.6mm	/	Ding	