


1-Line Bi-directional TVS Diode

Features

- Ultra small package: 1.0x0.6x0.5mm
- Protects one data or power line
- Ultra low leakage: nA level
- Operating voltage: 4.5V
- Low clamping voltage
- 2-pin leadless package
- Complies with following standards:
 - IEC 61000-4-2 (ESD) immunity test
 - Air discharge: $\pm 30\text{kV}$
 - Contact discharge: $\pm 30\text{kV}$
 - IEC61000-4-5 (Lightning) 40A (8/20 μs)
- Lead free in comply with EU RoHS 2011/65/EU directives



Mechanical Data

- Case: DFN1006
- Case Material: "Green" Molding Compound
- Terminal Connections: See Diagram Below
- Approx. Weight: 0.84mg

Applications

- Cellular Handsets and Accessories
- Personal Digital Assistants
- Notebooks and Handhelds
- Portable Instrumentation
- Digital Cameras
- Peripherals
- Keypads, Side Keys, LCD Displays

Ordering Information

Part Number	Marking	Shipping	Reel
LTE10N05C01HN-TR10	45	10000PCS Tape&Reel	7 inches



Absolute Maximum Ratings (Tamb=25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20μs)	Ppk	400	W
Peak Pulse Current (8/20μs)	IPP	40	A
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	VESD	±30 ±30	kV
Operating Temperature Range	TJ	-55 to +125	°C
Storage Temperature Range	Tstg	-55 to +150	°C

Electrical Characteristics (TA=25°C unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Working Voltage	VRWM			4.5	V	
Breakdown Voltage	VBR	4.8			V	IT = 1mA
Reverse Leakage Current	IR			0.2	μA	VRWM = 4.5V
Clamping Voltage	VC			6.5	V	IPP = 1A
Clamping Voltage	VC			10	V	IPP = 40A
Junction Capacitance	CJ		100		pF	VR = 0V, f = 1MHz



Characteristic Curves

Fig.1 Junction Capping vs Reverse Voltage

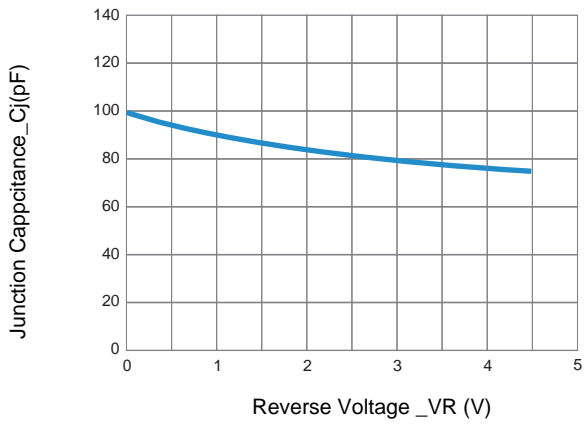


Fig.2 Peak Pulse Power vs Pulse Time

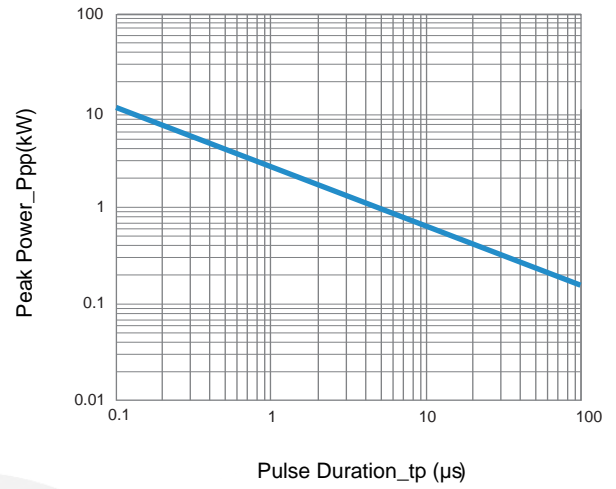


Fig.3 Clamping Voltage vs Peak Pulse Current (tp=8/20μs)

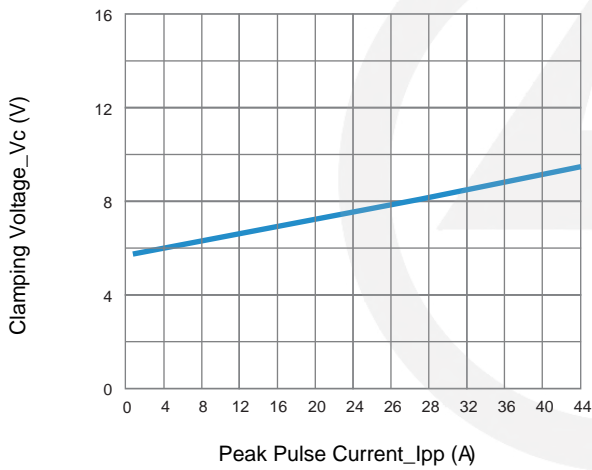


Fig.4 Power Derating Curve

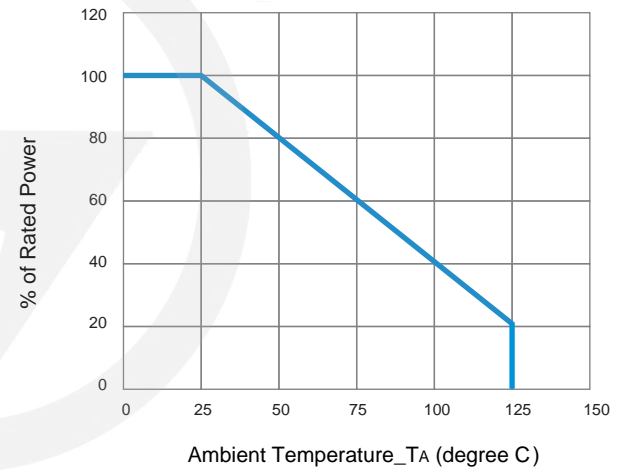


Fig.5 8x20μs Pulse Waveform



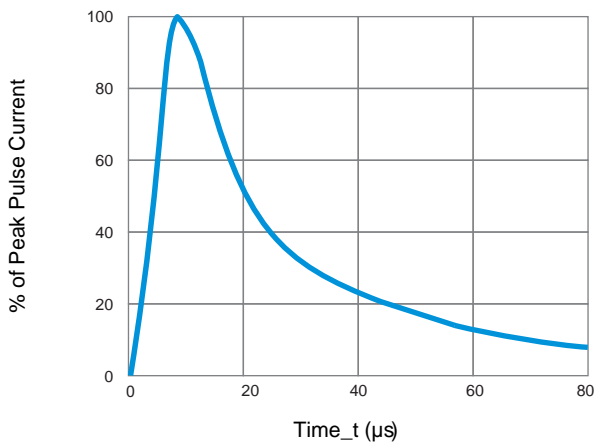


Fig.6 ESD Clamping Voltage 8kV Contact per IEC61000-4-2

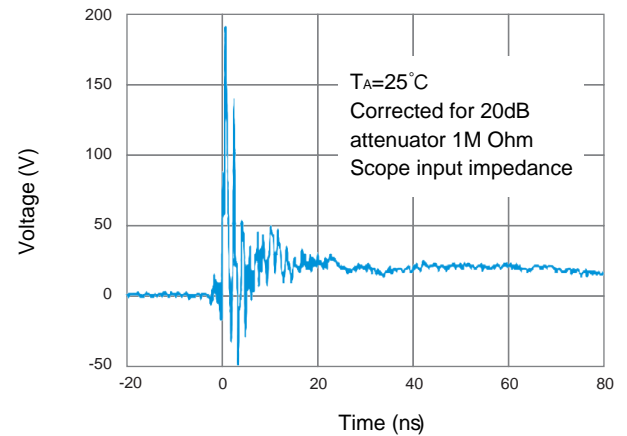


DFN-1006 Package Outline

Unit: mm

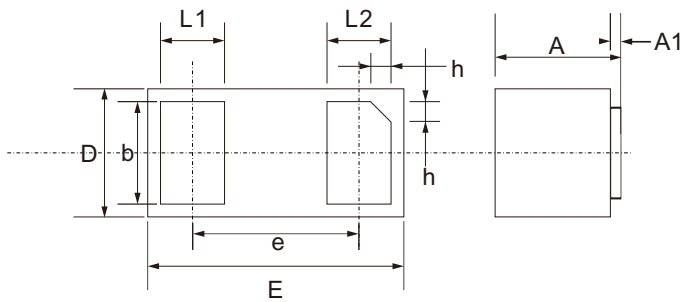

SYMBOL	DIMENSIONS	
	MIN.	MAX.
D	0.550	0.650
E	0.950	1.050
L1	0.200	0.300
L2	0.200	0.300
b	0.450	0.550
e	0.650 TYP.	
A	0.450	0.550
A1	0.000	0.050
h	0.070	0.170

DFN-1006 Suggested Pad Layout

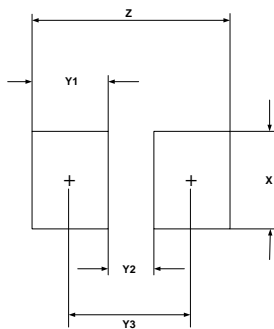


SYM	DIMENSIONS
	MILLIMETERS
X	0.60
Y1	0.50
Y2	0.30
Y3	0.80
Z	1.30

Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$
3. The pad layout is for reference purpose only.


Carrier Tape Dimensions

Unit : mm

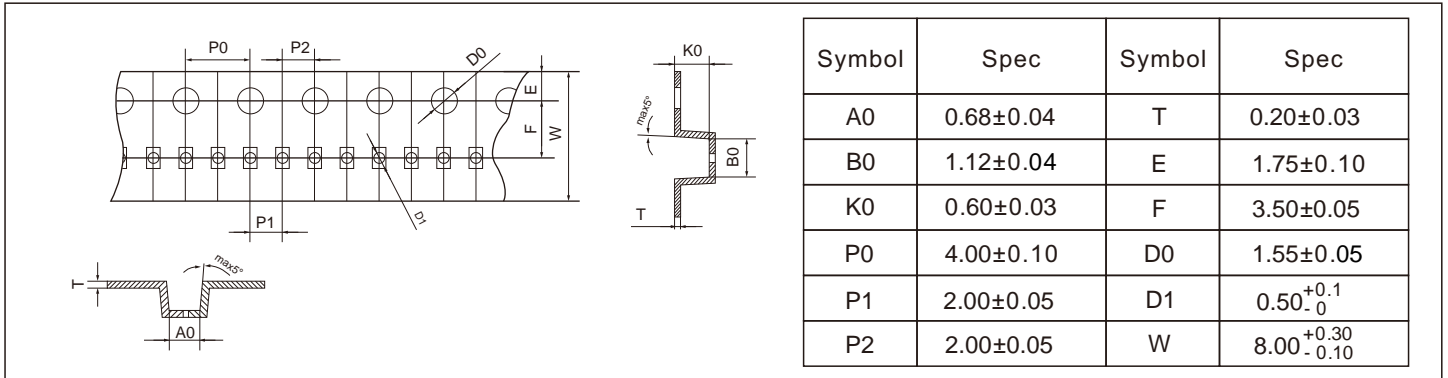


Reel Dimensions

Unit : mm

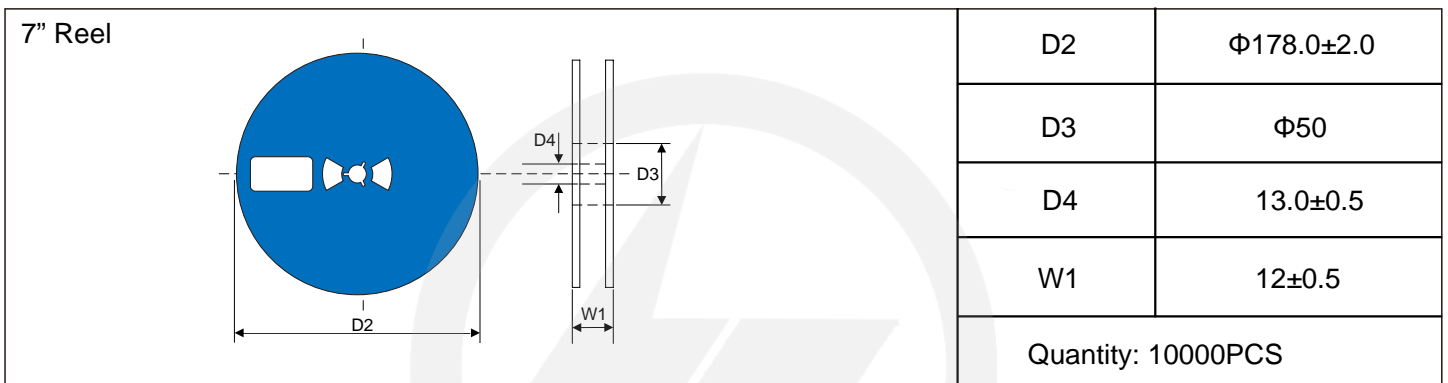

Packaging

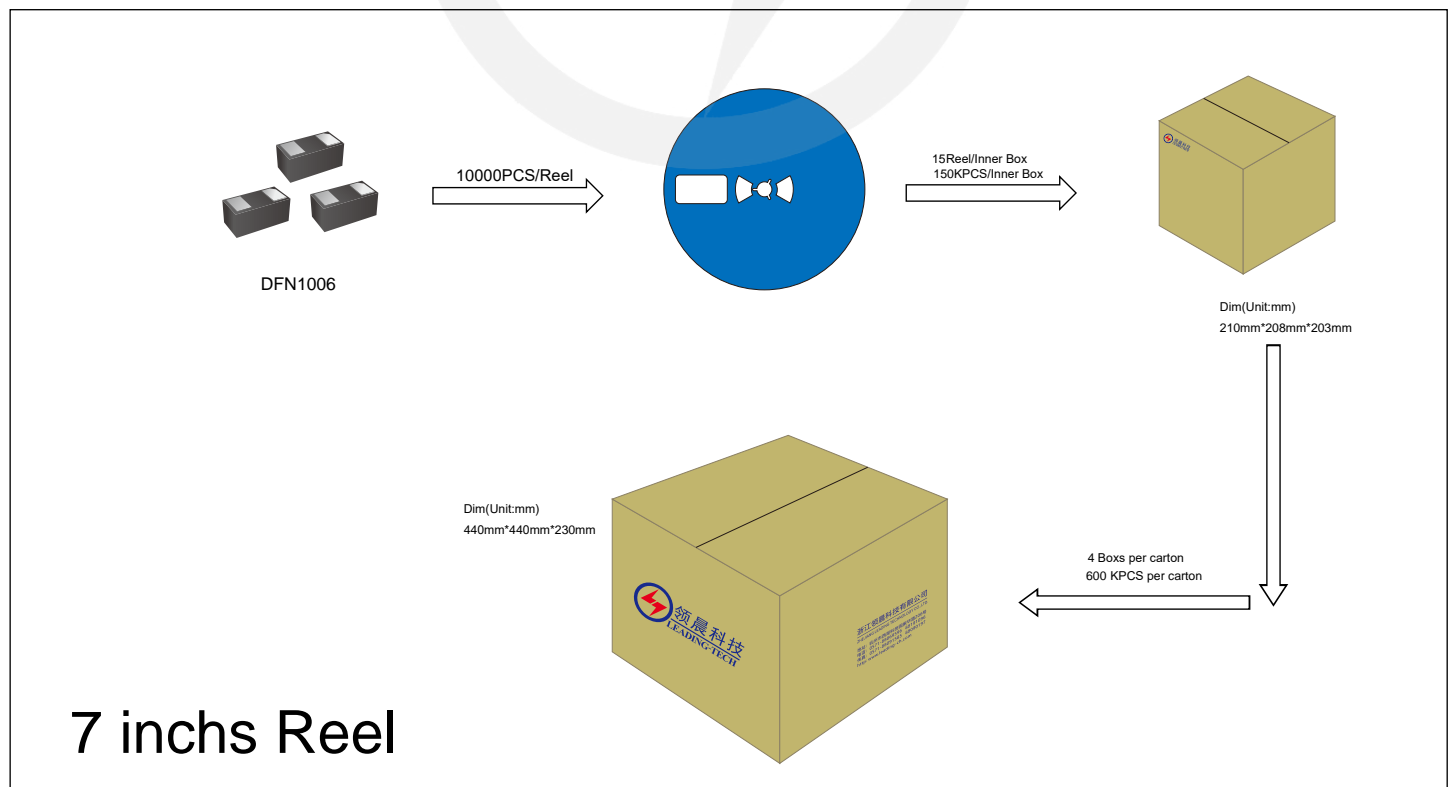



Recommended Soldering Conditions



Recommended Conditions

Profile Feature	Pb-Free Assembly
Average ramp-up rate (T _L to T _P)	3°C/second max.
Preheat	
-Temperature Min (T _{S min})	150°C
-Temperature Max (T _{S max})	200°C
-Time (min to max) (t _s)	60-180 seconds
T _{S max} to T _L	
-Ramp-up Rate	3°C/second max.
Time maintained above:	
-Temperature (T _L)	217°C
-Time (t _L)	60-150 seconds
Peak Temperature (T _P)	260°C
Time within 5°C of actual Peak Temperature (t _p)	20-40 seconds
Ramp-down Rate	6°C/second max.
Time 25°C to Peak Temperature	8 minutes max.

Important Notice and Disclaimer

Leading-Tech reverses the right to make changes to this document and its products and specifications at any time without notice.

Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Leading-Tech makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, not does Leading-Tech assume any liability for application assistance or customer product design.

Leading-Tech does not warrant or accept any liability with products which are purchase or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Leading-Tech.

Leading-Tech products are not authorized for use as critical components in life support devices or systems without express written approval of Leading-tech.

Version Update Information

Series NO.	Enactment/Revision Date	Effective Date	Version	Revision Content	Revision Reason	Revision Person	Note
01	2024.05.16	2024.05.16	3.0	New file	/	Ding	