


Surface Mount Schottky Barrier Rectifier

Features

- Metal silicon junction, majority carrier conduction.
- For surface mounted applications.
- Low power loss, high efficiency.
- High forward surge current capability.
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications.

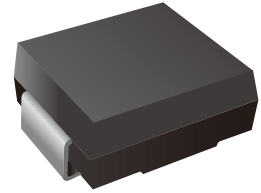

Mechanical Data

- Case: SMC
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.22g / 0.0077oz
- Marking:SS36

Maximum Ratings and Characteristics

Parameter	Symbols	LT36CL	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	60	V
Maximum RMS voltage	V_{RMS}	42	V
Maximum DC Blocking Voltage	V_{DC}	60	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	3.0	A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	80	A
Max Instantaneous Forward Voltage at 3 A	V_F	0.70	V
Maximum DC Reverse Current $T_a = 25^{\circ}\text{C}$ at Rated DC Reverse Voltage $T_a = 100^{\circ}\text{C}$	I_R	0.055 5	mA
Typical Junction Capacitance ⁽¹⁾	C_j	450	pF
Type Thermal Resistance Junction-Ambient ⁽²⁾	$R_{\theta JA}$	50	$^{\circ}\text{C}/\text{W}$
Type Thermal Resistance Junction-Lead ⁽²⁾	$R_{\theta JL}$	20	$^{\circ}\text{C}/\text{W}$
Operating Junction Temperature Range	T_j	-55 ~ +150	$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}	-55 ~ +150	$^{\circ}\text{C}$

(1) Measured at 1 MHz and applied reverse voltage of 4 V D.C

(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

CHARACTERISTIC CURVES

Fig.1 Forward Current Derating Curve

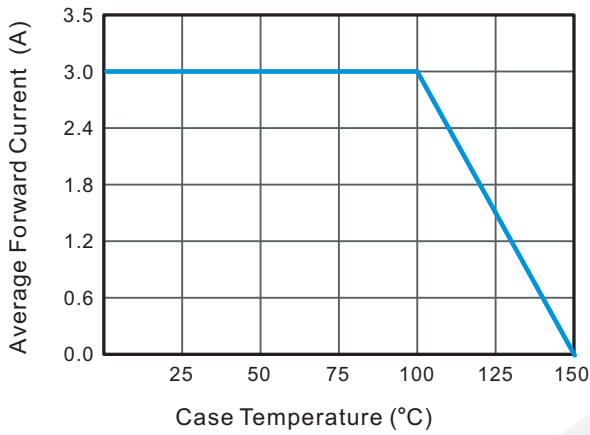


Fig.2 Typical Reverse Characteristics

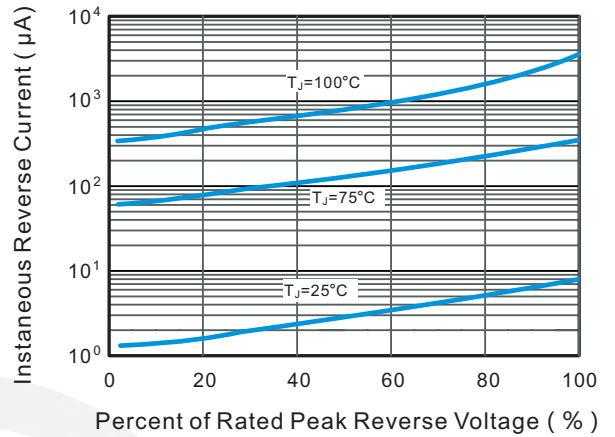


Fig.3 Typical Forward Characteristic

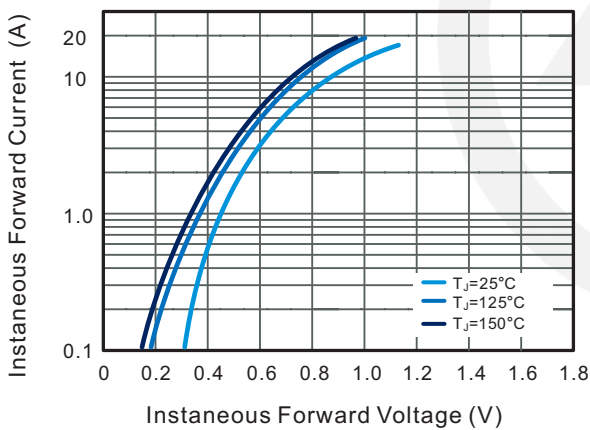


Fig.4 Typical Junction Capacitance

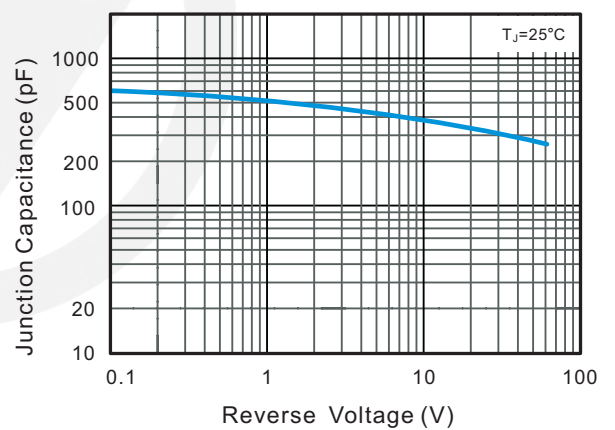


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current



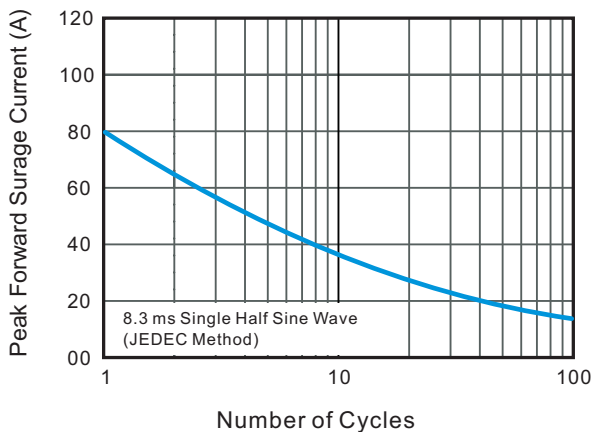


Fig.6- Typical Transient Thermal Impedance

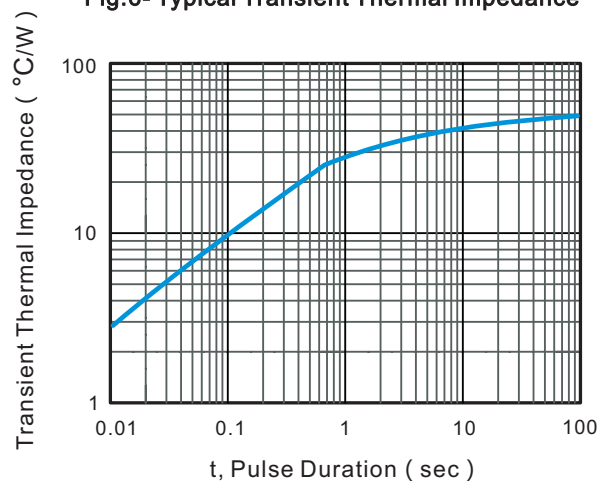


SMC Package Outline

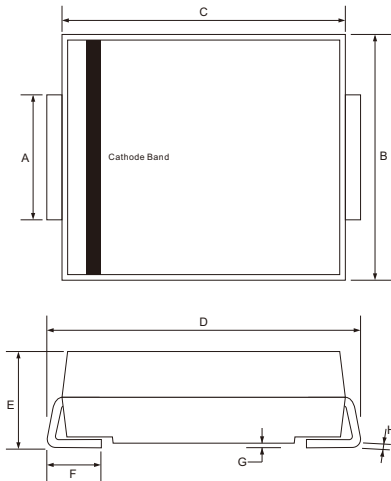

Unit: mm


SYMBOL	DIMENSIONS	
	MIN.	MAX.
A	2.75	3.27
B	5.59	6.22
C	6.50	7.11
D	7.60	8.13
E	1.99	2.62
F	0.76	1.60
G	0.05	0.31
H	0.10	0.31

SMC Suggested Pad Layout

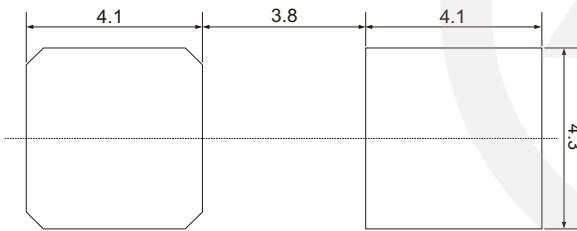

Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$
3. The pad layout is for reference purpose only.

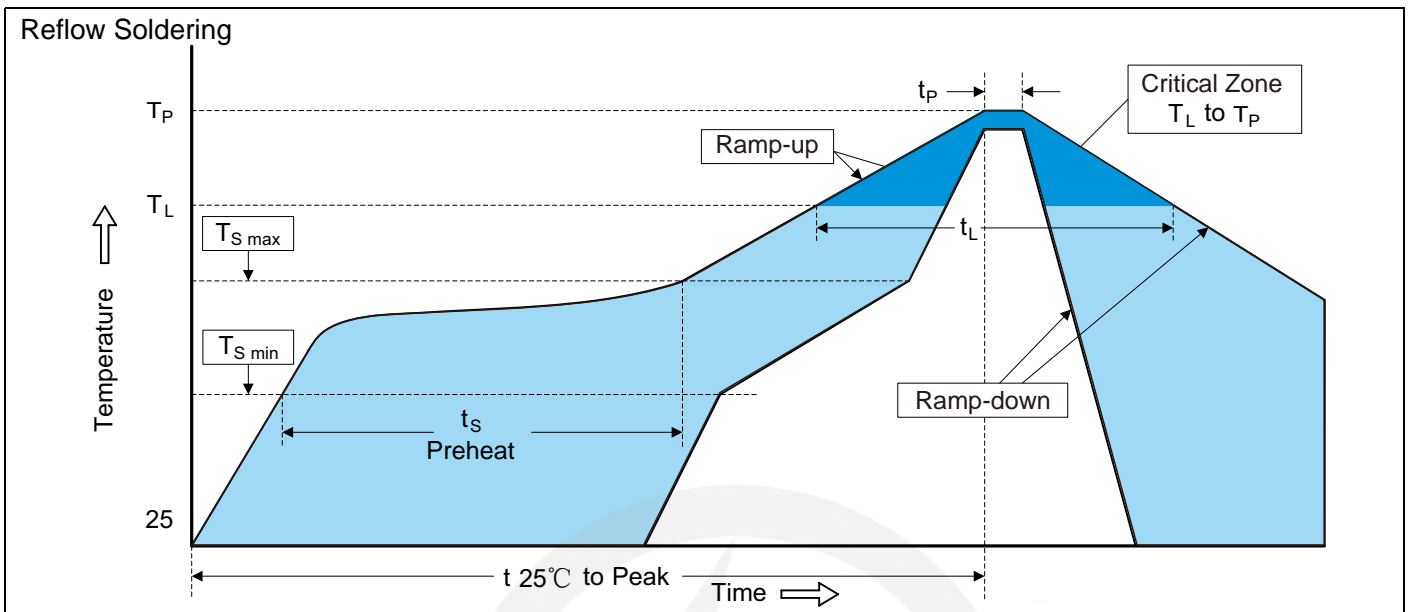Recommended Soldering Conditions

Recommended Conditions

Profile Feature	Pb-Free Assembly
Average ramp-up rate (T _L to T _P)	3°C/second max.
Preheat -Temperature Min (T _{S min}) -Temperature Max (T _{S max}) -Time (min to max) (t _s)	150°C 200°C 60-180 seconds
T _{S max} to T _L -Ramp-up Rate	3°C/second max.
Time maintained above: -Temperature (T _L) -Time (t _L)	217°C 60-150 seconds
Peak Temperature (T _P)	260°C
Time within 5°C of actual Peak Temperature (t _P)	20-40 seconds
Ramp-down Rate	6°C/second max.
Time 25°C to Peak Temperature	8 minutes max.

Packaging

13" Reel



D5 Φ330.0±2.0

D6 Φ13.5±0.5

H 2.5±1.0

W2 16.0±2.0

Quantity: 3000PCS